PATENTED SLIDING DOOR SILL SYSTEM

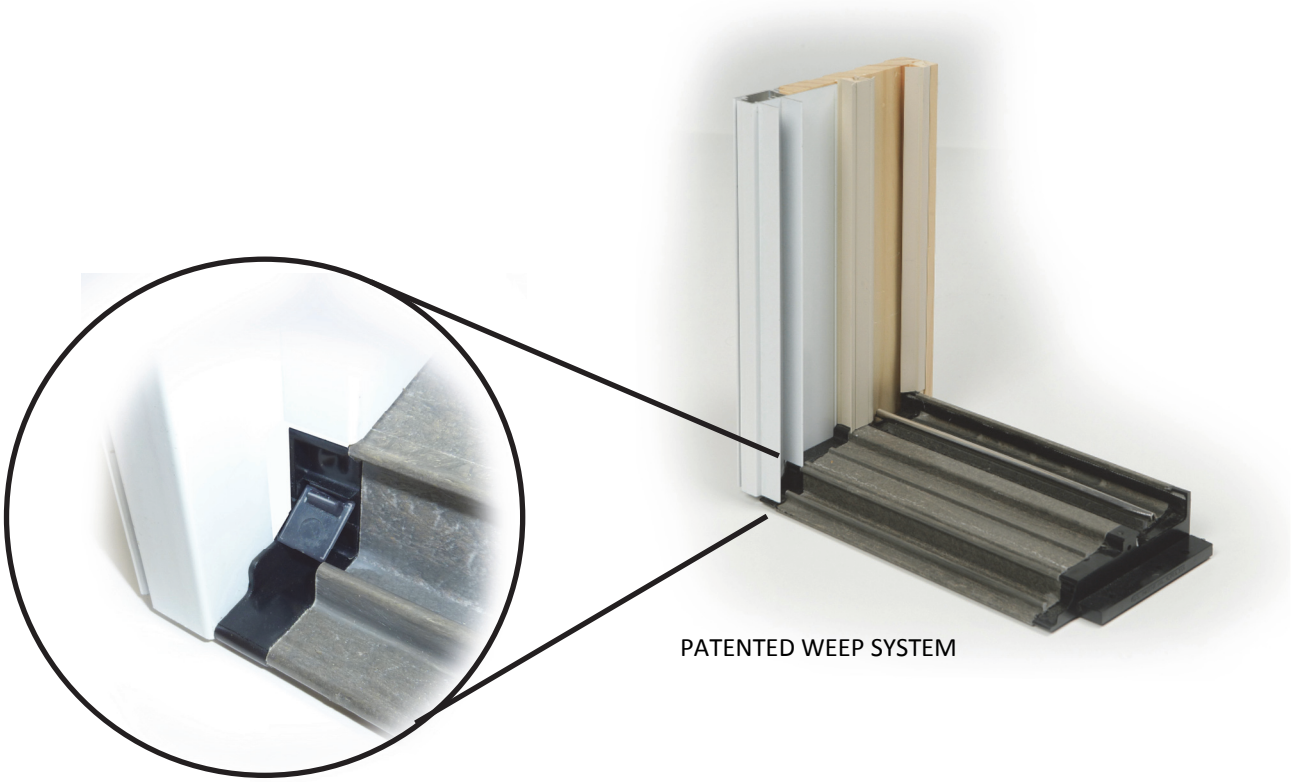

FEATURES AND BENEFITS:

- PATENTED DESIGN CARRIES RESIDUAL WATER TO THE EXTERIOR
- LOW THERMAL CONDUCTIVITY DUE TO PULTRUDED FIBERGLASS SILL BODY
- JAMB SITS ABOVE SUBFLOOR LEVER ON END PLUG—AWAY FROM WATER! DETAIL A
- JAMB IS FIRMLY SEATED AND ATTACHED THROUGH END CAP
- STAINLESS STEEL ROLLER TRACK
- DURABLE SILL WEATHERSTIPPING
- SCREEN TRACK
- INTERLOCK SEAL PAD

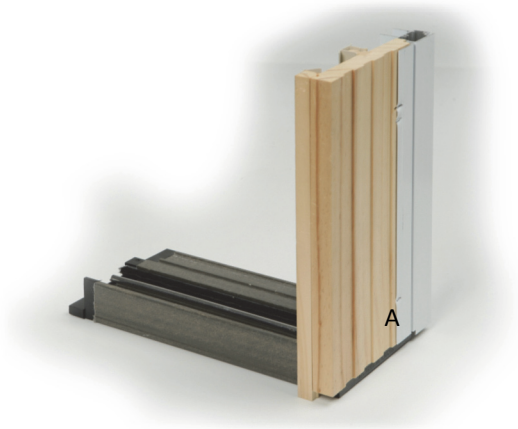

SLIDING DOOR SILL SYSTEM

AVAILABLE DESIGNS



STANDARD SLIDING
DOOR SILL FOR:
OX, XO, O, OXXO
OPERATION

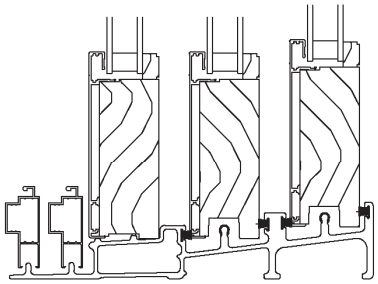

TELESCOPE SLIDING
DOOR SILL FOR:
OXX, XXO, OXXXXO
OPERATION

SPECIFY BY BETWEEN THE JAMB DIMENSION

SIX PANEL TELESCOPE UNIT (OXXXXO)